LED Strip Series

SH30G&SH30F











Application

City lighting, landscape lighting, commercial lighting and house contour lighting, etc.

Features

Super bright SMD5050 as the light source, high brightness, good color conformity and no spot.

Low power consumption.

Use double-layer imported roller copper FPC, good folding endurance.

Silicon glue dropping, never turn yellow or rigid.


CE, RoHS and UL certified.



Parameters


Item		Parameter	
Part Number	SH30G		SH30F
LED Type		SMD5050	
LEDs/m		30	
Colors		RGB	
Beaming Angle(°)		120	
Luminous Flux (Im)		600	
Voltage (V)		DC12	
Power (W)		7.2	
Dimension (mm)		1000*10.0*2.0	
Weight (g)	38		60
Working Tem. (□)		-25∼+60	
Storage Tem. (□)		-25∼+70	
Protection Grade	IP33		IP65

Dimension






Beaming Angle



Wire connection

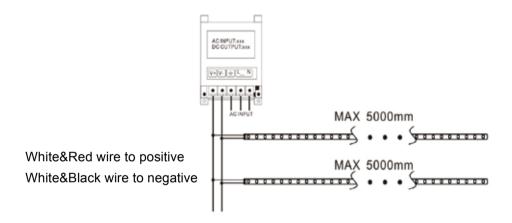

Packing





Packing Specification

Anti-static bag adopted

Packing information

Model	SH30G	SH30F
Carton dimension(mm)	490*450*220	
Bags per carton(pcs)	80	60
Quantity per carton(m)	400	300
Net Weight(kg)	6.32(1±10%)	10.13(1±10%)
Gross Weight(kg)	10.72(1±10%)	13.43(1±10%)

Due to the packing manner difference, please adhere to the original products in case of discrepancy found between the picture and actual product.

Warning

Disassembling or modifying the product is forbidden.

Installation with power on is forbidden.

Any organic solvent chemical is forbidden.

Isolation or corrosion prevention on all wiring points and wire ends.

Make sure the power wire is big enough and ensure the voltage and connection are all correct before power on.

Installation, maintenance shall be done by professional staff.

5M in a serial connection maximum.

The power wire between power supplier and LED strips should be less than two meters to keep the same brightness on all parts.



Declaration

Warranty: 3 years.

To ensure the safety, the broken wires need to be changed by the manufacturer or the service agent, or by the staff with the similar qualification.

The given data in the specification is the laboratory data, there may be discrepancy found in the actual products.

The given drawings in the specification are only for reference, there may be discrepancy found in the actual products.

The products are subject to change without prior notification.









